



NEROLAC


EXCEL RAINGUARD WATERPROOFING EMULSION FOR VERTICAL WALLS



PRODUCT DESCRIPTION

Excel Rain Guard Waterproofing Emulsion for Vertical Walls is composed of high quality acrylic emulsion polymer, light fast & weather durable pigments, selected & graded fine fillers, specialty additives. It is used as a waterproofing & protective coating for exterior walls of the buildings as it forms higher film thickness, has excellent flexibility, breathing properties, water resistance, crack-bridging ability, weathering durability and an excellent resistance to the growth of micro-organisms.

PERFORMANCE FEATURES & BENEFITS

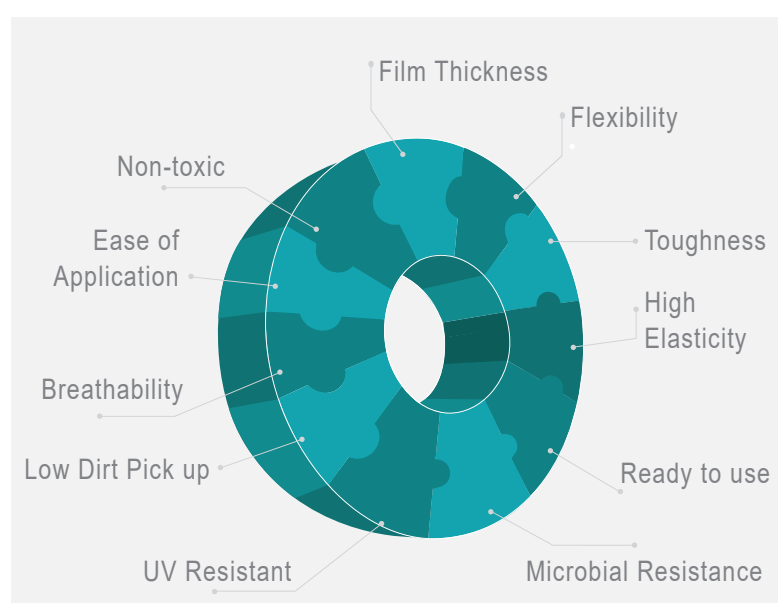

SURFACE PREPARATION

- 1 All new cement-sand renderings / concrete surfaces should be allowed to age 6 to 8 weeks before surface coating.
- 2 Surface for treatment must be thoroughly cleaned of all laitance, loose material, oil, grease, etc. by mechanical means such as wire brushing & shot blasting.
- 3 Finally, vacuum cleaning of all loose solids and liquids can be done, if required.
- 4 All surface cracks upto 3 mm width should be filled with suitable crack filling compounds or polymer-modified mortar in case of wider cracks.

RECOMMENDED USAGE

All types of exterior masonry surfaces, concrete, cement sand renderings, asbestos sheets etc.


RECOMMENDED SYSTEM FOR APPLICATION

1 Apply one coat of Nerolac Excel Rainguard Primer Project (dilute 1 ltr of Basecoat with 300ml of water for fresh painting & without dilution for re-painting) and apply at forced spreading rate of 50-55 sq.ft./ltr and 30-35 sq.ft./ltr. For fresh and repainting respectively. Apply second coat without dilution with a spreading rate of 40-45 sq.ft./ltr.

2 Apply two neat coats of Raincoat without dilution by brush or roller at a time interval of 5-6 hours. For enhanced protection, apply additional coat of excel Rain Guard Waterproofing Exterior For Vertical walls on rain lashing walls, chajjas and parapet walls. Allow the coated surface to air cure fully for 7 days.



TECHNICAL DATA

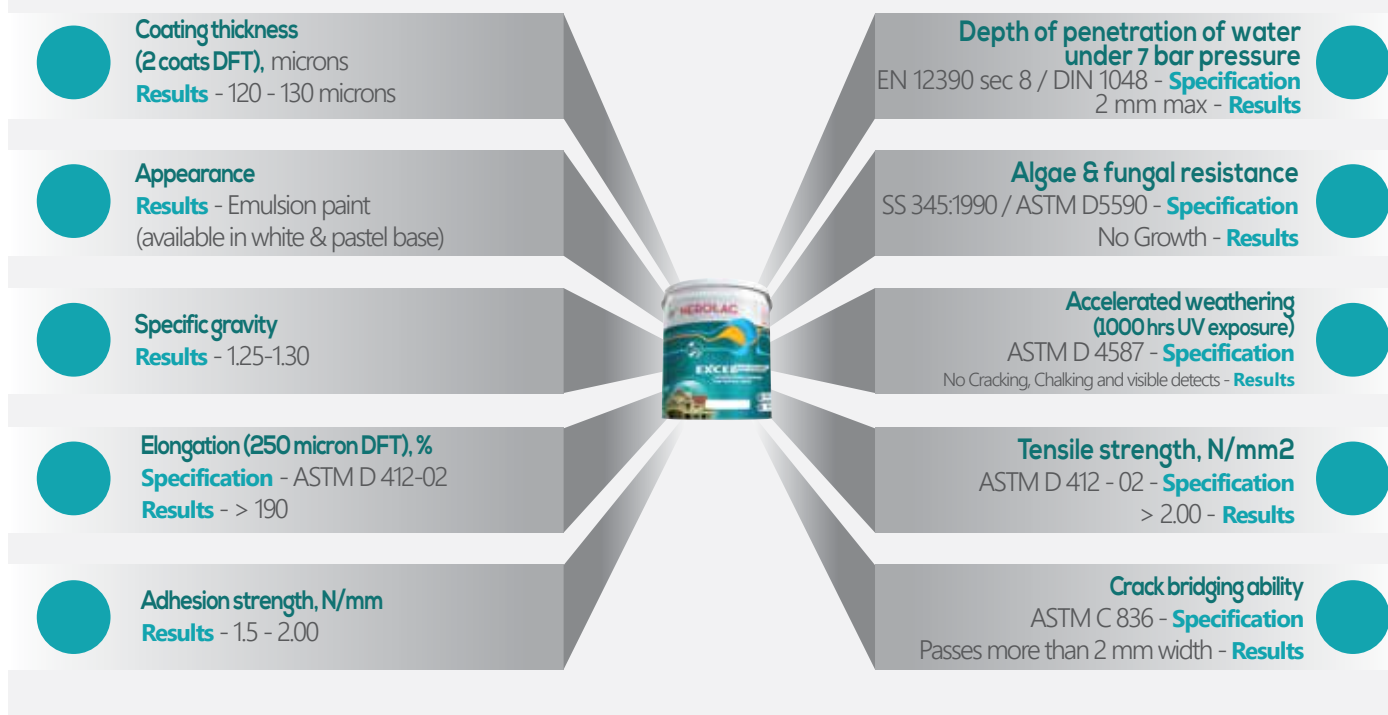

PRECAUTIONS



1. Do not dilute EXCEL RAIN GUARD WATERPROOFING EMULSION FOR VERTICAL WALLS.
2. Recommended to be primed with EXCEL RAIN GUARD WATERPROOF PRIMER only.
3. Do not apply when ambient temperature is below 10°C or above 45°C.
4. Do not apply in direct sunlight or during rains.
5. Adhesion property may get affected over poor quality putty and very smooth surfaces.

COVERAGE

40-50 sq ft per litre for 2 coats by brush application.

Coverage may vary depending upon the texture and porosity of the surface & type of tool used for application.

SHELF LIFE & STORAGE

- Shelf life is 24 months from the date of manufacturing in unopened condition
- Store in a cool & dry place
- Keep away from direct sunlight

PACK SIZES:

1, 4 & 20 ltrs.

HEALTH & SAFETY PRECAUTIONS

- Avoid inhalation, eye and skin contact. In case of contact, wash with water and seek medical attention
- Do not pour the leftovers in the drain. Dispose off after natural drying

DISCLAIMER The product information & application details given by the company have been provided in good faith & meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products, therefore actual performance will depend on local factors prevailing at that point on time. Users are advised to carry out sample tests taking trials to ensure suitability of products for their requirement, prior to full scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tool! technique and surface preparation, any structural defects, inferior quality of material other than paints. Warranty! Guarantee clauses shall accordingly be amended.

