



NEROLAC

PEARLS LUSTRE FINISH


WATER BASED INTERIOR



PRODUCT DESCRIPTION

Nerolac Water Based Pearls Lustre Finish is a Special Interior Wall paint that captures the magic glow of pearls and the intrinsic resilience of the shell. Other benefits associated with the product are Low Odour, Excellent Washability, Stain, Fungal & Bacteria resistance. It can be applied on Wood and Masonry surfaces.

PERFORMANCE FEATURES & BENEFITS

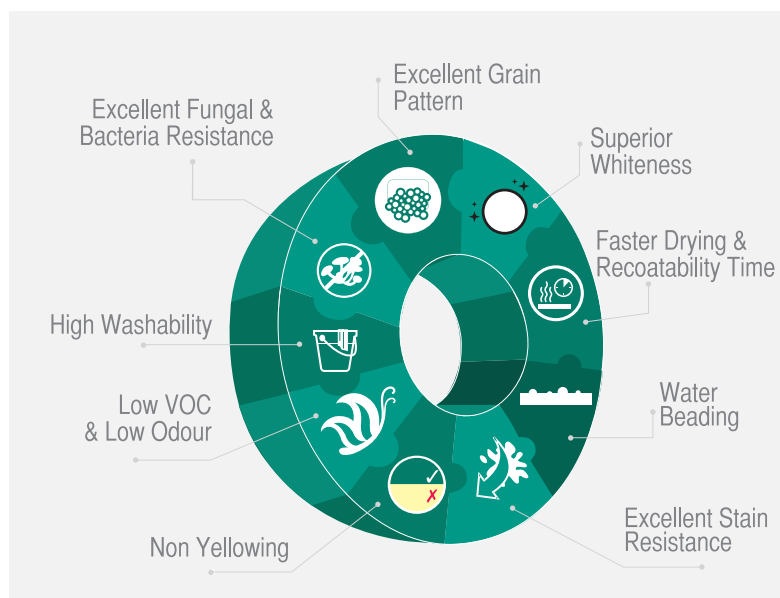

RECOMMENDED USAGE

Masonry Wall, Wood

SURFACE PREPARATION

- 1 Ensure the surface is clean dry and free from all defective or poorly adhering material, dirt, grease, wax etc,
- 2 Remove all loose or poorly adhering materials by rubbing down using a suitable abrasive paper and thereafter wipe off.
- 3 Treat the fungus affected area by using Nerolac Fungicidal Solution. Allow to react for 6- 8 hrs.
- 4 Apply a coat of suitable Primer followed by Putty (if required) to level the dents and make the surface uniform.
- 5 Apply again a coat of suitable Primer.
- 6 Then apply 2-3 coats of Nerolac Water Based Pearls Lustre Finish.

RECOMMENDED SYSTEM FOR APPLICATION

For Masonry Surfaces / For Wooden Surface

For Repainting on smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces skip 1 and 2 start with step 3

- 1 Primer* (1 coat) Dry Min 6-8 hrs.
- 2 Putty (Nerolac wall putty) Dry 8 hrs.
- 3 Primer* (1 coat) Dry Min 6-8 hrs.
- 4 Finish Nerolac Water Based Pearls Lustre (2 to 3 coats)
Dry Min 4-6 hrs. in between coats

Sand the surface with emery paper and wipe clean before application of subsequent coat. For better sheen, use a solvent based version of primers *Nerolac Cement Primer (Solvent Thinnable) or Self priming with 50% thinning or Goody Universal Primer (Solvent Thinnable). # Minimum 8 Hrs for Solvent Thinnable Primer & Minimum 4-6 Hrs for Self Priming.

TECHNICAL DATA



COVERAGE***

13.00-14.86 sq. mt/ltr/coat, on smooth non absorbent surface



DRYING TIME

Surface Dry : 30 Min.



RECOATING

Min. 4-6 hrs. @27 ± 2°C & RH 60 ± 5%



VOC IN GM/KG OR GM/L

< 50 gms/ltr

THINNING

Upto 30% by volume using water



FLASH POINT

NA



STABILITY OF THINNED PAINT

Use within 24 hrs



DRY FILM THICKNESS (IN MICRONS) /COAT

30-50



GLOSS LEVELS/SHEEN LEVELS

Silky Sheen

2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

PRECAUTIONS



1. Refer to the MSDS for ' Nerolac Water based Pearls Lustre ' for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact wash with plenty of water.
5. Inhalation / Injection can be dangerous. In either case, move to fresh air & consult medical practitioners in both the cases.
6. Do not apply when ambient temperature might drop to level below 10°C within 4 hrs of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir well tinted paint after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

For removing stains, clean with a mild soap solution using sponge and wipe the surface. Ensure a drying time of 1 week before cleaning.

SAFETY FEATURES:



Non-Flammable.

PACK SIZES:



1ltr., 4 ltrs., 10 ltrs., 20 ltrs.

SHADE RANGE:



As per Color Scapes Fandeck & Shade Card

NO. OF SHADES POSSIBLE:

According to Colourscape Fandeck

