



# NEROLAC




## BEAUTY GOLD PREMIUM FINISH

### WASHABLE SMOOTH FINISH

#### PRODUCT DESCRIPTION

Nerolac Beauty GOLD is a specially formulated emulsion paint based on a durable copolymer resin, high opacity, micronised pigments, and additives to give better, beautifying and stain resistance properties.

#### PERFORMANCE FEATURES & BENEFITS

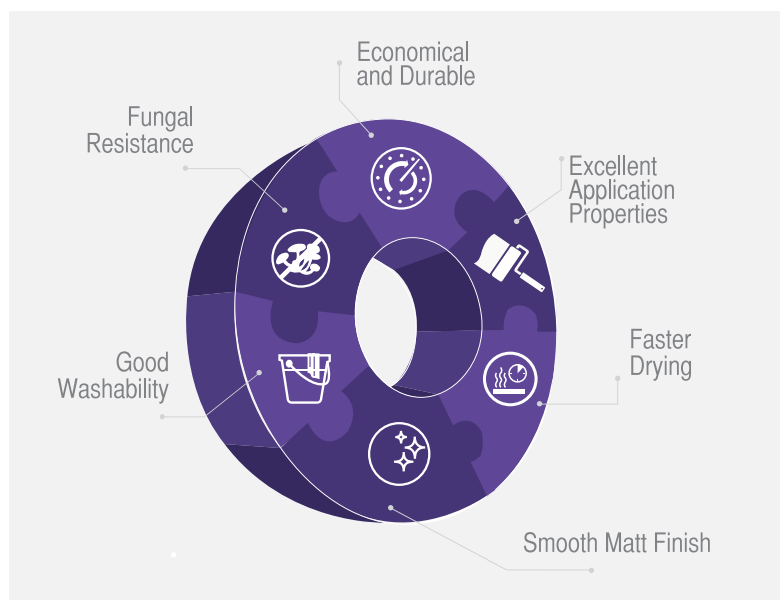

#### RECOMMENDED USAGE

It is recommended for interior application to a wide variety of new or previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboard, building boards, etc. It can be applied on ceiling and wall surfaces where a matt finish, free-from-irritating-glare due to light reflection, is desired

#### RECOMMENDED SYSTEM FOR APPLICATION

##### For New Masonry Surfaces

- 1 Primer\*\* (1 coat) Dry in 4 - 6 hrs.
- 2 Putty## Dry in 6 - 8 hrs.
- 3 Primer\*\* (1 coat) Dry in 4 - 6 hrs.
- 4 Finish Nerolac Beauty Premium Acrylic Emulsion Washable Smooth Finish (2-3 coats)  
Dry min. 4-6 hrs. in between coats.

Sand the surface with Emery paper and wipe clean before application of subsequent coat.

\*\*Nerolac Cement Primer (water thinnable / solvent thinnable) or Goody Universal Primer (Solvent thinnable) or Goody water thinnable Cement Primer

##Nerolac Wall Putty or Nerolac Cement Putty

#Minimum 8 hrs for Solvent Thinnable Primer & minimum 4-6 hrs for Water Thinnable Primer

#### SURFACE PREPARATION

- 1 Ensure the surface is clean, dry, # free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down, using suitable abrasive paper and thereafter wipe off.
- 2 Treat fungus-affected area using Nerolac Fungicidal Solution. Allow it to react for 6 - 8 hrs.
- 3 Apply a coat of suitable Primer\*\* followed by Nerolac Wall Putty# to level the dents and make the surface uniform.
- 4 Apply again a coat of suitable Primer\*\*.
- 5 Then apply two to three coats of Nerolac Beauty Premium Acrylic Emulsion Washable Smooth Finish.

For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces skip steps 1 and 2 and start with step 3

## TECHNICAL DATA



### COVERAGE\*\*\*

25.08-27.87 sq. mt/ltr/coat when applied to smooth and non-absorbent surface



### DRYING TIME

Surface Dry: 30 minutes



### RECOATING

Min. 4 - 6 hrs. (@27°± 2°C & RH 60 ± 5%)



### GLOSS LEVELS/SHEEN LEVELS

Sheen



### VOC IN GM/KG OR GM/L

< 50 gms/ltr



### THINNING

50% by volume using water.



### FLASH POINT

NA



### STABILITY OF THINNED PAINT

Use within 24 hrs



### DRY FILM THICKNESS (IN MICRONS) /COAT

20-25 : Brush  
35-40 : Roller



### WASHABLE

Moderate



\*\*\*Actual coverage may vary depending on Method, Condition of Application, Type of Tools, Surface Porosity & Shade. Use of Felt Roller may reduce coverage upto 50%.

## PRECAUTIONS



1. Refer MSDS for "Nerolac Beauty Premium Acrylic Emulsion Washable Smooth Finish" for safety measures & precautions.
2. Store in well-ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection can be dangerous. In either case, move to fresh air & consult medical practitioners.
6. Do not apply when ambient temperature might drop to levels below 10° within 4 hrs of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

## POST APPLICATION INSTRUCTIONS

Surfaces painted with Nerolac Beauty Gold Premium Finish Washable Smooth Finish are washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.

### SAFETY FEATURES:

Non-Flammable.

### PACK SIZES:

1 Ltr, 4 Ltrs, 10 Ltrs, & 20 Ltrs.

### SHADE RANGE:

As per Beauty Range Shade Card & Colour Scapes Fandek..

### NO. OF SHADES POSSIBLE:

More Than 1450

